

**SPECIFICATIONS:**

Nominal Voltage: 1.4V  
Rated Capacity: 900mAh  
 at 300Ω  
 to 0.9V  
 at 25°C 60% RH

Average weight: 4.1g

Volume: 1.21cm<sup>3</sup>

Terminals: FLAT

Operating Temp. Range: 0°C to

50°C


Impedance: ≤ 0.5Ω  
 at 1000Hz

Limiting Current: 60mA  
 @1.1V

IEC: PR2330

**DISCHARGE CHARACTERISTICS AT 300Ω 25°C 60% RH**

(Discharged 24 hours /day)

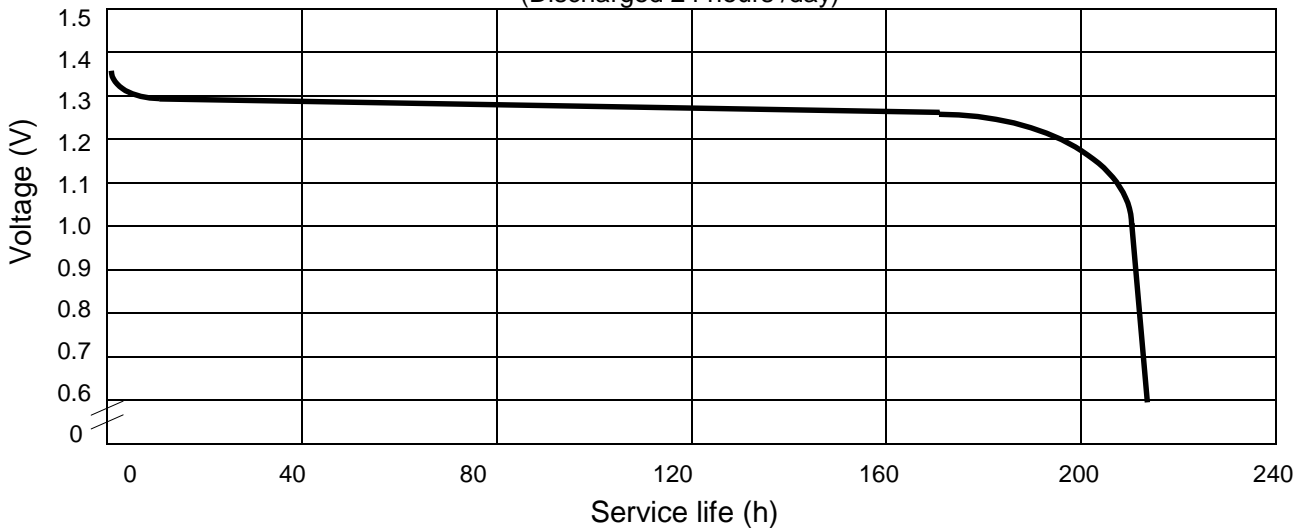

**Zhuhai Sabuar Ebtroid Teboby Co.,Ltd**

AD. Cheng Building No. 8,  
 Mogou Q. Zhuhai City, P. R. China.

Home Page: [www.seidenbattery.com](http://www.seidenbattery.com)

Tel: +86-756-8535719 Fax: +86-756-8535469

This data sheet is subject to change without prior notice.  
 Contact us for the latest information. Contents here do not  
 constitute a warranty. OCT., 2002